



FIG. 2 PRIOR ART

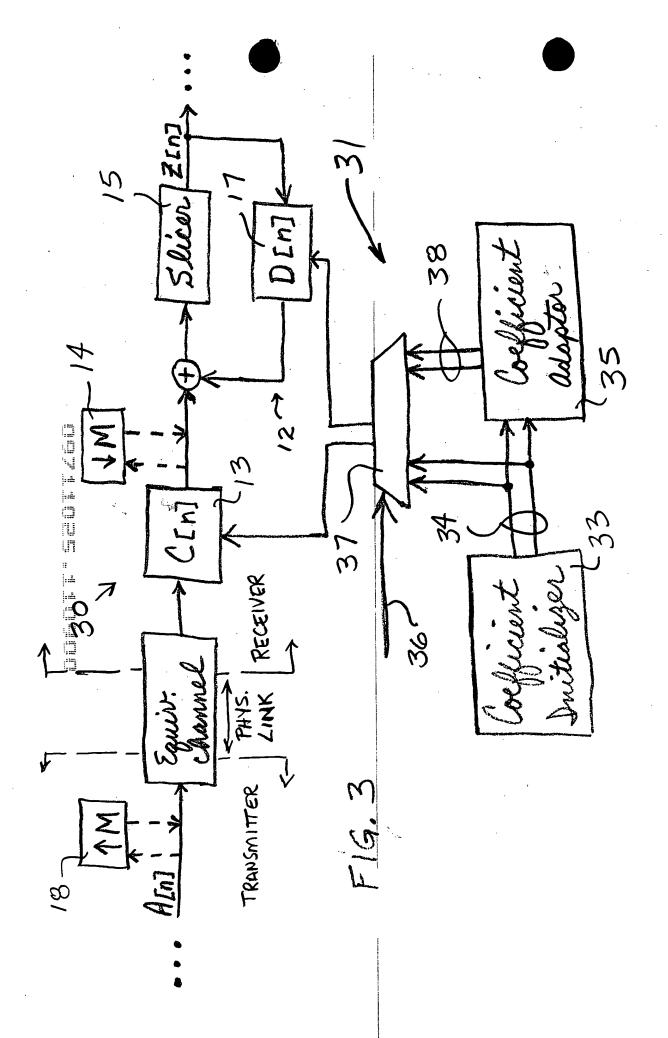

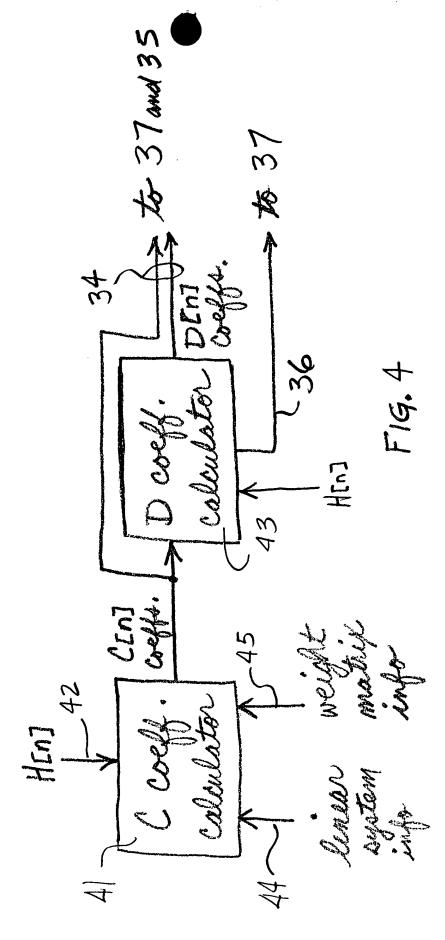

Burst arrive? FIG. 5 assign HEn] taps Use first algorithm to initialize subset of C[n] Coefficients Initealize DIN] Use subsequent coeffs. based on coeffs. to decode initialized C[n] unknown symbols coeffs and HIN] Use second algorithm to determine subsequent coeffs. of C[n] and D[n] based on initialized Coeffs.